

AD-A237 327



2

AD

TECHNICAL REPORT ARCCB-TR-91018

**GOOD, BETTER, AND BEST MESHES IN
PIECEWISE LINEAR INTERPOLATION**

ROYCE W. SOANES

MAY 1991

DTIC
ELECTE
JUN 27 1991
S B D



**US ARMY ARMAMENT RESEARCH,
DEVELOPMENT AND ENGINEERING CENTER
CLOSE COMBAT ARMAMENTS CENTER
BENÉT LABORATORIES
WATERVLIET, N.Y. 12189-4050**



APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

91-03167



DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The use of trade name(s) and/or manufacturer(s) does not constitute an official indorsement or approval.

DESTRUCTION NOTICE

For classified documents, follow the procedures in DoD 5200.22-M, Industrial Security Manual, Section II-19 or DoD 5200.1-R, Information Security Program Regulation, Chapter IX.

For unclassified, limited documents, destroy by any method that will prevent disclosure of contents or reconstruction of the document.

For unclassified, unlimited documents, destroy when the report is no longer needed. Do not return it to the originator.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER ARCCB-TR-91018	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) GOOD, BETTER, AND BEST MESHES IN PIECEWISE LINEAR INTERPOLATION		5. TYPE OF REPORT & PERIOD COVERED Final
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Royce W. Soanes		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army ARDEC Benet Laboratories, SMCAR-CCB-TL Watervliet, NY 12189-4050		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS AMCMS No. 6111.02.H610.011 PRON No. 1A84Z8CANMSC
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army ARDEC Close Combat Armaments Center Picatinny Arsenal, NJ 07806-5000		12. REPORT DATE May 1991
		13. NUMBER OF PAGES 14
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Adaptive Numerical Methods Linear Interpolation Variable Knots Error Equidistribution Error Analysis Good Meshes		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) We first describe the "good" meshes obtained by C. deBoor which roughly equidistribute the classical error bound in piecewise linear interpolation. We then proceed to obtain "better" meshes which more precisely equidistribute this bound. Finally, we obtain meshes which equidistribute the maximum absolute error (not bound) and refer to these meshes as "best." Some graphical results are then presented comparing these three types of meshes.		

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION	1
GOOD MESHES	1
REFERENCES	9

LIST OF ILLUSTRATIONS

1. First test function defined on good, better, and best meshes	10
2. First test function error bound and maximum error patterns for good, better, and best meshes	11
3. Second test function defined on good, better, and best meshes	12
4. Second test function error bound and maximum error patterns for good, better, and best meshes	13

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Avail and/or Special	
A-1	

INTRODUCTION

The classical bound on the error in linear interpolation of function f on interval (a,b) is given by

$$\frac{1}{8}(b-a)^2 \|f''\|_{(a,b)}$$

where

$$\|f''\|_{(a,b)} = \sup_{a \leq x \leq b} |f''(x)|$$

We wish to obtain meshes $(x_i, 1 \leq i \leq n)$ which will somehow equilibrate the "error" over each subinterval.

GOOD MESHES

C. deBoor (ref 1) has supplied us with a computationally simple method for generating what he calls "good" meshes. His idea is to make the classical bound roughly constant

$$\frac{1}{8}(x_{i+1}-x_i)^2 \|f''\|_{(x_i, x_{i+1})} = \text{constant} \quad 1 \leq i < n$$

This is equivalent to

$$(x_{i+1}-x_i) \|f''\|_{(x_i, x_{i+1})}^{\frac{1}{2}} = \text{constant}$$

or

$$\int_{x_i}^{x_{i+1}} \|f''\|_{(x_i, x_{i+1})}^{\frac{1}{2}} dx = c$$

As n becomes large and $x_{i+1}-x_i \rightarrow 0$ for all i , we approximate the integrand by $|f''(x)|^{\frac{1}{2}} = g(x)$.

Thus, we have a relatively simple problem to solve

$$\int_{x_i}^{x_{i+1}} g(x) dx = c \quad 1 \leq i < n$$

If we define $G(x) = \int_{x_1}^x g(t) dt$, we have $G(x_i) = (i-1)c$, therefore

$$\frac{G(x_i)}{G(x_n)} = \frac{i-1}{n-1} \text{ and } x_i = G^{-1} \left[\frac{i-1}{n-1} G(x_n) \right] \quad 1 < i < n$$

In practice, we may only have a positive, continuous, piecewise linear estimate of g over some mesh u . We denote this estimate of g by v . G as defined by

$$G(x) = \int_{u_1}^x v(t) dt \quad u_1 < x < u_m$$

would then be piecewise quadratic and invertible in the following manner:

$$G^{-1}(G^*) = x^* = u_i + 2 \frac{(G^* - G_i)}{v_i + \sqrt{D}}$$

where

$$G_1 = 0, \quad G_{j+1} = G_j + (u_{j+1} - u_j)(v_j + v_{j+1})/2 \quad 1 \leq j < m$$

$$G_i \leq G^* \leq G_{i+1}$$

$$\rho = (G^* - G_i)/(G_{i+1} - G_i)$$

and

$$D = (1-\rho)v_i^2 + \rho v_{i+1}^2$$

All this is common knowledge. Unfortunately, good meshes do not always seem quite as good as we might like them to be. The shorter subintervals have a fairly uniform error bound pattern, but the lengths of the longer subintervals are overestimated, yielding larger error bounds. This is due to the fact that the integral of the norm of g is underestimated by the integral of g . In fact, it is easy to prove that for $f(x) = x^p$ ($p > 2$, $0 \leq x \leq 1$), the largest error bound on a good mesh is exactly equal to the largest error bound on the corresponding uniform mesh ($x_{j+1} - x_j = \text{const}$).

In order to get what we might call "better" meshes, we go back to the original problem:

Find $n-2$ x 's (x_1 and x_n fixed) such that

$$(x_{i+1}-x_i)\|g\|(x_i, x_{i+1}) = \int_{x_i}^{x_{i+1}} \|g\|(x_i, x_{i+1}) dx = c \quad 1 \leq i < n$$

This problem is described in Reference 1 as being rather difficult to solve in general. Even if we knew what c was, solving

$$(x_{i+1}-x_i)\|g\|(x_i, x_{i+1}) = c$$

for x_{i+1} given x_i would not be easy. The problem obtained upon substituting v for g , however, is quite easy to solve (ref 2). In addition, if v is a very good approximation to g (with $m \gg n$), we get a virtually constant error bound for the entire mesh!

We refer to the following equation as the "stepping" equation:

$$(\beta-\alpha)\|v\|(\alpha, \beta) = c$$

The solution of the stepping equation for β given α and c represents the central part of our algorithm for obtaining better meshes. Although the stepping equation is nonlinear in β , the piecewise linearity of v enables us to solve it noniteratively. For given α and c , we solve the stepping equation in the following manner. Suppose $\alpha \in (u_i, u_{i+1})$ and we have located j such that

$$(u_j-\alpha)\|v\|(\alpha, u_j) < c < (u_{j+1}-\alpha)\|v\|(\alpha, u_{j+1})$$

Hence,

$$\beta \in (u_j, u_{j+1})$$

To locate j , we simply search from left to right, computing the norms as we go and checking the previous inequality. We use

$$\|v\|(\alpha, u_{i+1}) = \text{Max}(v(\alpha), v_{i+1})$$

and

$$\|v\|(\alpha, u_{j+1}) = \text{Max}(\|v\|(\alpha, u_j), v_{j+1})$$

Now if

$$\|v\|(\alpha, u_j) = \|v\|(\alpha, u_{j+1})$$

we have

$$(\beta - \alpha) \|v\|(\alpha, u_j) = c$$

hence

$$\beta = \alpha + c / \|v\|(\alpha, u_j)$$

But if

$$\|v\|(\alpha, u_j) < \|v\|(\alpha, u_{j+1})$$

there is a

$$t \in (u_j, u_{j+1})$$

such that

$$\|v\|(\alpha, u_j) = \|v\|(\alpha, t) = v(t)$$

and this t is given by

$$t = u_j + (\|v\|(\alpha, u_j) - v_j) / s$$

where

$$s = (v_{j+1} - v_j) / (u_{j+1} - u_j)$$

Now if

$$(t - \alpha) \|v\|(\alpha, u_j) > c$$

β must lie to the left of t and

$$\beta = \alpha + c / \|v\|(\alpha, u_j)$$

as before, but if

$$(t - \alpha) \|v\|(\alpha, u_j) < c$$

β lies to the right of t and

$$(\beta - \alpha) \|v\|(\alpha, \beta) = c$$

However, in this case,

$$\|v\|(\alpha, \beta) = v(\beta) = v_j + s(\beta - u_j)$$

Therefore,

$$(\beta - \alpha)(v_j + s(\beta - u_j)) = c$$

or

$$(\beta - \alpha)(v_j + s(\beta - \alpha - u_j)) = c$$

or

$$s(\beta - \alpha)^2 + k(\beta - \alpha) - c = 0$$

where

$$k = v_j + s(\alpha - u_j)$$

Solving this simple quadratic equation for $\beta - \alpha$ yields

$$\beta = \alpha + (\sqrt{k^2 + 4sc} - k)/(2s) \text{ for } k < 0$$

and

$$\beta = \alpha + 2c/(k + \sqrt{k^2 + 4sc}) \text{ for } k > 0$$

Having elaborated the solution to the stepping equation for arbitrary c , we now consider obtaining the correct value of c by defining the function μ

$$\mu(c) = \nu - n$$

where ν is the number of x 's we get by solving the stepping equation $\nu - 2$ times (x_1 and $x_\nu = x_n$ being fixed). It is intuitively clear that for small c , μ will be positive and for large c , μ will be negative. Since μ is a step function, we are interested only in its leftmost zero, the correct value of c . When the correct value of c has been obtained, we shall have concurrently obtained the better or uniform error bound mesh. Therefore, we see that to find the better mesh, we need only solve a single nonlinear equation in a single unknown (by modified bisection), where each evaluation of μ involves an $O(m)$ search through the (u, v) data and $O(n)$ solutions of simple linear or quadratic equations.

Suppose we are not satisfied with better meshes and decide to take the additional step of finding the best possible mesh. We define this best mesh as one in which the maximum absolute error is constant, independent of subinterval. Now we must work in terms of exact error instead of error bounds. The exact error in linear interpolation of f on interval (a,b) is given by

$$e(x) = \frac{b-x}{b-a} \int_a^x (t-a)f''(t)dt + \frac{x-a}{b-a} \int_x^b (b-t)f''(t)dt$$

If x_m is the maximizing or minimizing point of e ,

$$e'(x_m) = 0$$

implies

$$\int_a^{x_m} (t-a)f''(t)dt = \int_{x_m}^b (b-t)f''(t)dt$$

which, in turn, implies that

$$e(x_m) = \int_a^{x_m} (t-a)f''(t)dt = \int_{x_m}^b (b-t)f''(t)dt$$

These last two equations tell us that for given a , E , and f'' , we can, in principle, solve

$$E = \int_a^{x_m} (t-a)f''(t)dt$$

for x_m and then solve

$$E = \int_{x_m}^b (b-t)f''(t)dt$$

for b . We therefore see that finding the best mesh is not a very different process from finding the better mesh. The major difference is that two equations must be solved in the stepping process instead of one. This stepping

process is further simplified to solving simple quadratic equations if we use a piecewise constant approximation to f'' .

The first half of the stepping process amounts to solving

$$R(\beta) = \pm E \text{ for } \beta$$

given α where

$$R(\beta) = \int_{\alpha}^{\beta} (t-\alpha) f''(t) dt$$

If $f''(x) = c_i$ on (u_i, u_{i+1}) , we have

$$R(\beta) = \int_{\alpha}^{u_i} (t-\alpha) f''(t) dt + \int_{u_i}^{\beta} (t-\alpha) c_i dt \quad (\beta \in (u_i, u_{i+1}))$$

$$R(\beta) = R(u_i) + \frac{1}{2} c_i (t-\alpha)^2 \Big|_{u_i}^{\beta}$$

$$= R(u_i) + \frac{1}{2} c_i ((\beta-\alpha)^2 - (u_i-\alpha)^2)$$

$$= R(u_i) + \frac{1}{2} c_i (\beta - u_i)(\beta + u_i - 2\alpha)$$

The recursion for R is

$$R_{i+1} = R_i + \frac{1}{2} c_i (u_{i+1} - u_i)(u_i + u_{i+1} - 2\alpha)$$

The second half of the stepping process amounts to solving

$$S(\gamma) = \pm E \text{ for } \gamma$$

given β where

$$S(\gamma) = \int_{\beta}^{\gamma} (\gamma-t) f''(t) dt$$

For $\gamma \in (u_i, u_{i+1})$, we have

$$S(\gamma) = \int_{\beta}^{u_i} (\gamma-t) f''(t) dt + \int_{u_i}^{\gamma} (\gamma-t) c_i dt$$

$$= \int_{\beta}^{u_i} (u_i - t + \gamma - u_i) f''(t) dt + \frac{1}{2} c_i (\gamma - t)^2 \Big|_{u_i}^{\gamma}$$

$$= S(u_i) + (\gamma - u_i) \int_{\beta}^{u_i} f''(t) dt + \frac{1}{2} c_i (\gamma - u_i)^2$$

Letting

$$T_i = \int_{\beta}^{u_i} f''(t) dt$$

we have

$$T_{i+1} = T_i + c_i(u_{i+1}-u_i)$$

and the recursion for S

$$S_{i+1} = S_i + (u_{i+1}-u_i)T_i + \frac{1}{2} c_i(u_{i+1}-u_i)^2$$

We mention in passing that after we have computed β , and as we search for γ , we will need to compute additional β 's if there are inflection points present in f .

Having given this rather brief sketch of the best mesh process, we proceed to some interesting graphical results shown in Figures 1 through 4. We have obtained good, better, and best meshes for the simple test functions $x^3(1-x)^6$ and x^{10} , and we may describe our little odyssey as follows. Starting with deBoor's good mesh with its predictably large bounds on the long subintervals, we then proceed to flatten these bounds out almost perfectly through the better mesh. Proceeding one additional step to obtain the best mesh (whose maximum error can indeed be seen to be constant), we then note the striking similarity between the good mesh and the best mesh. One might therefore say that in going from good to better to best meshes, we have come nearly full circle and can see the wisdom of the old French proverb: "The more things change, the more they remain the same." It would seem that the only thing deBoor can be criticized for is excessive modesty in referring to his meshes as merely good when, in fact, they are nearly best.

REFERENCES

1. C. deBoor, A Practical Guide to Splines, Springer-Verlag, New York, 1978.
2. R.W. Soanes, "Uniform Error Bound Meshes in Piecewise Linear Interpolation," Transactions of the Sixth Army Conference on Applied Mathematics and Computing, ARO-89-1, U.S. Army Research Office, Research Triangle Park, NC, 1989.

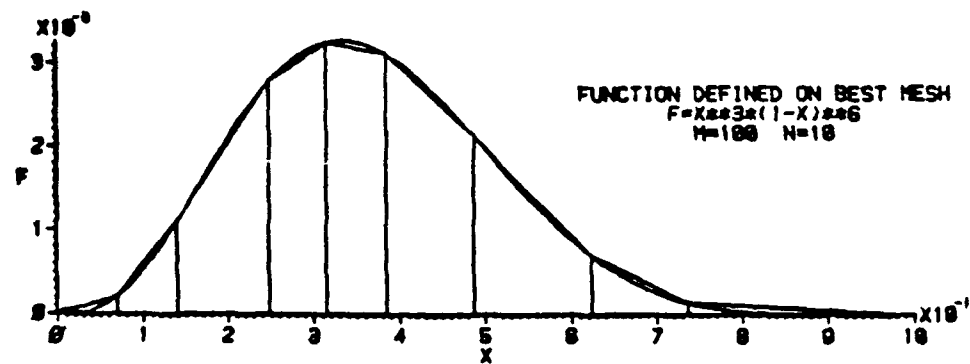
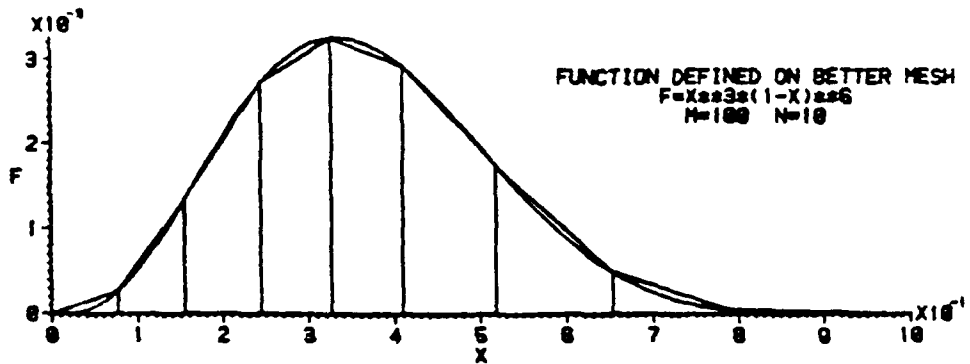
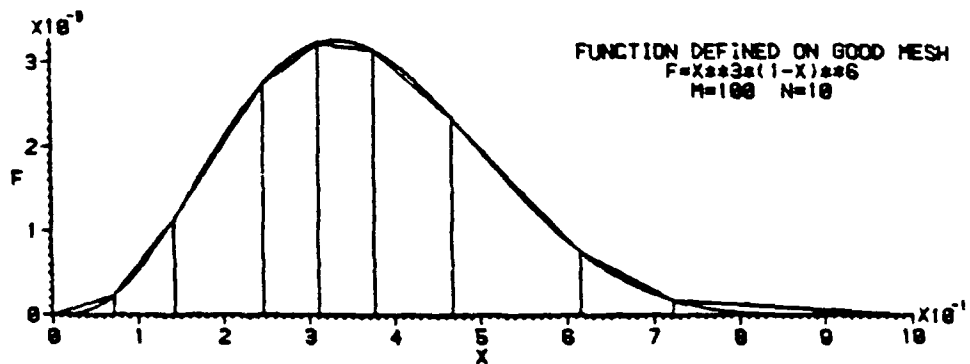


Figure 1. First test function defined on good, better, and best meshes.





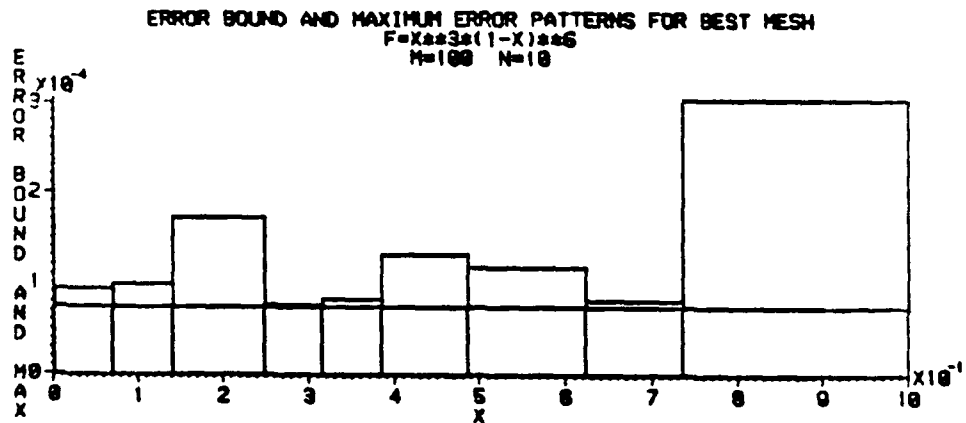


Figure 2. First test function error bound and maximum error patterns for good, better, and best meshes.

FUNCTION DEFINED ON GOOD MESH
 $F = X \pm 10$
 $M=200$ $N=20$

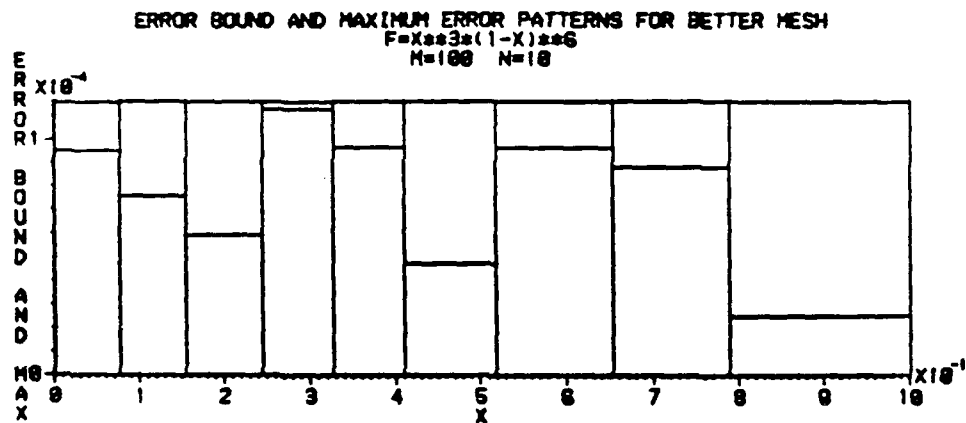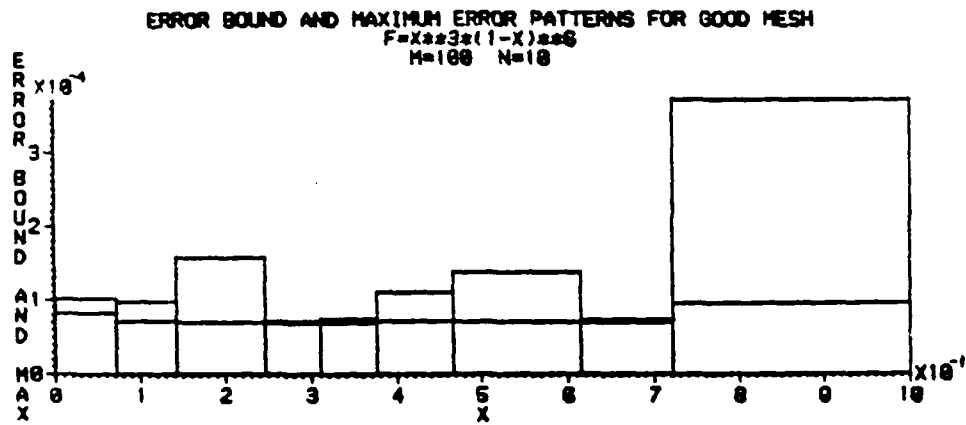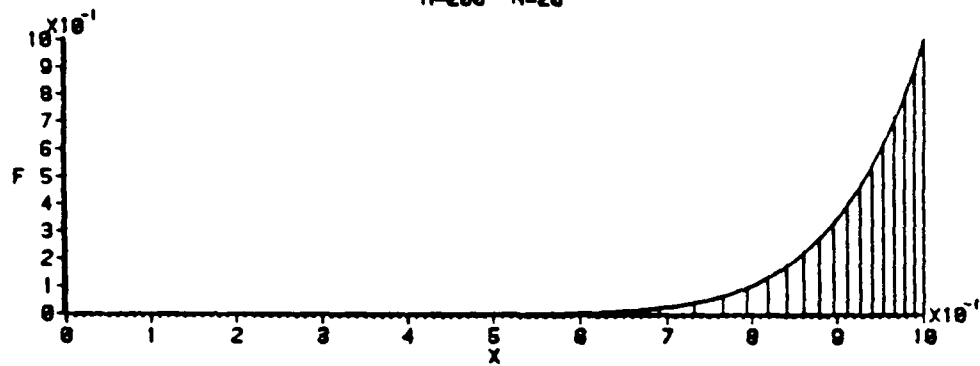

FUNCTION DEFINED ON BETTER MESH
 $F = X \pm 10$
 $M=200$ $N=20$

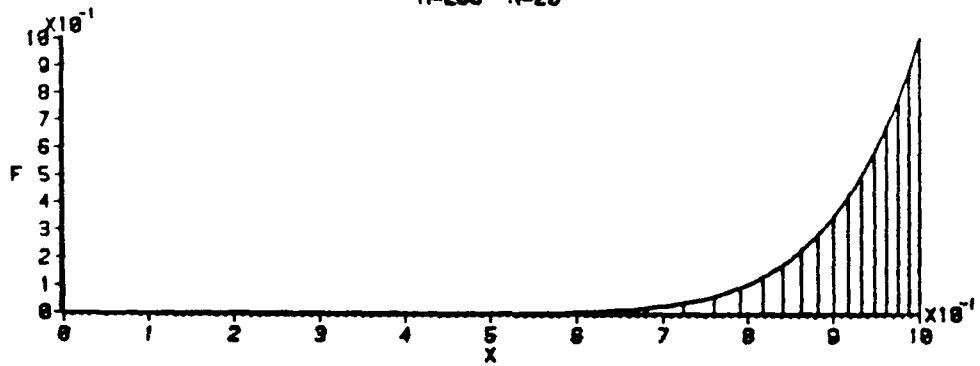

FUNCTION DEFINED ON BEST MESH
 $F = X \pm 10$
 $M=200$ $N=20$

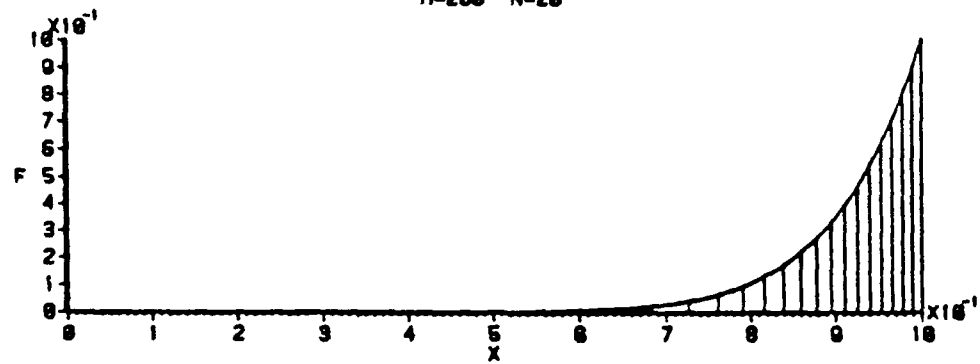


Figure 3. Second test function defined on good, better, and best meshes.

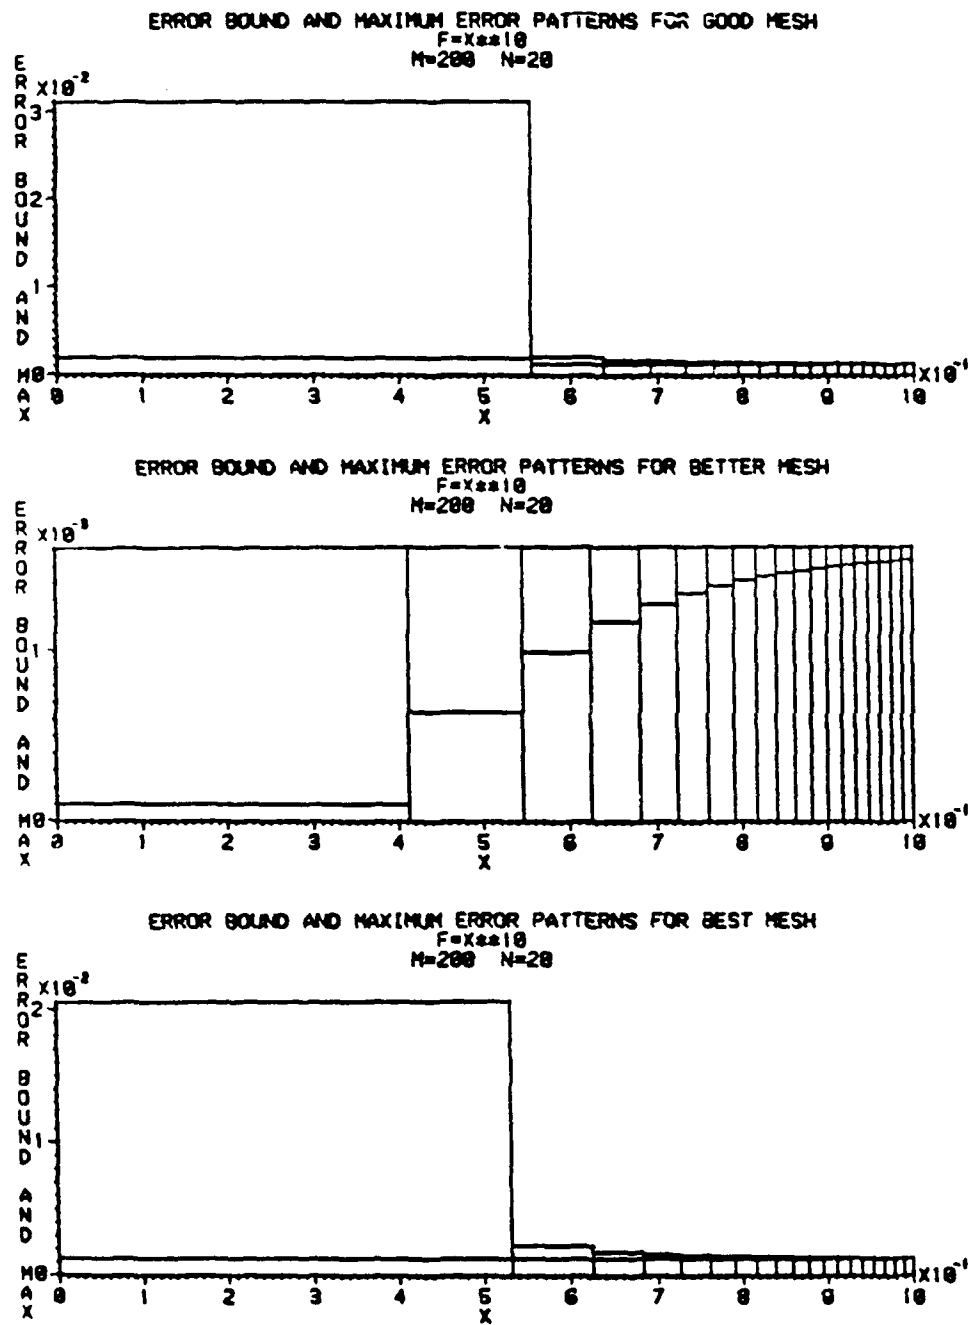


Figure 4. Second test function error bound and maximum error patterns for good, better, and best meshes.

TECHNICAL REPORT INTERNAL DISTRIBUTION LIST

	NO. OF COPIES
CHIEF, DEVELOPMENT ENGINEERING DIVISION	
ATTN: SMCAR-CCB-D	1
-DA	1
-DC	1
-DI	1
-DP	1
-DR	1
-DS (SYSTEMS)	1
CHIEF, ENGINEERING SUPPORT DIVISION	
ATTN: SMCAR-CCB-S	1
-SE	1
CHIEF, RESEARCH DIVISION	
ATTN: SMCAR-CCB-R	2
-RA	1
-RE	1
-RM	1
-RP	1
-RT	1
TECHNICAL LIBRARY	
ATTN: SMCAR-CCB-TL	5
TECHNICAL PUBLICATIONS & EDITING SECTION	
ATTN: SMCAR-CCB-TL	3
OPERATIONS DIRECTORATE	
ATTN: SMCWV-ODP-P	1
DIRECTOR, PROCUREMENT DIRECTORATE	
ATTN: SMCWV-PP	1
DIRECTOR, PRODUCT ASSURANCE DIRECTORATE	
ATTN: SMCWV-QA	1

NOTE: PLEASE NOTIFY DIRECTOR, BENET LABORATORIES, ATTN: SMCAR-CCB-TL, OF ANY ADDRESS CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST

	NO. OF COPIES		NO. OF COPIES
ASST SEC OF THE ARMY RESEARCH AND DEVELOPMENT ATTN: DEPT FOR SCI AND TECH THE PENTAGON WASHINGTON, D.C. 20310-0103	1	COMMANDER ROCK ISLAND ARSENAL ATTN: SMCRI-ENM ROCK ISLAND, IL 61299-5000	1
ADMINISTRATOR DEFENSE TECHNICAL INFO CENTER ATTN: DTIC-FDAC CAMERON STATION ALEXANDRIA, VA 22304-6145	12	DIRECTOR US ARMY INDUSTRIAL BASE ENGR ACTV ATTN: AMXIB-P ROCK ISLAND, IL 61299-7260	1
COMMANDER US ARMY ARDEC ATTN: SMCAR-AEE	1	COMMANDER US ARMY TANK-AUTMV R&D COMMAND ATTN: AMSTA-DDL (TECH LIB) WARREN, MI 48397-5000	1
SMCAR-AES, BLDG. 321	1	COMMANDER US MILITARY ACADEMY ATTN: DEPARTMENT OF MECHANICS WEST POINT, NY 10996-1792	1
SMCAR-AET-O, BLDG. 351N	1		
SMCAR-CC	1		
SMCAR-CCP-A	1		
SMCAR-FSA	1		
SMCAR-FSM-E	1	US ARMY MISSILE COMMAND REDSTONE SCIENTIFIC INFO CTR ATTN: DOCUMENTS SECT, BLDG. 4484 REDSTONE ARSENAL, AL 35898-5241	2
SMCAR-FSS-O, BLDG. 94	1		
SMCAR-IMI-I (STINFO) BLDG. 59	2		
PICATINNY ARSENAL, NJ 07806-5000			
DIRECTOR US ARMY BALLISTIC RESEARCH LABORATORY ATTN: SLCBR-DD-T, BLDG. 305 ABERDEEN PROVING GROUND, MD 21005-5066	1	COMMANDER US ARMY FGN SCIENCE AND TECH CTR ATTN: DRXST-SD 220 7TH STREET, N.E. CHARLOTTESVILLE, VA 22901	1
DIRECTOR US ARMY MATERIEL SYSTEMS ANALYSIS ACTV ATTN: AMXSY-MP ABERDEEN PROVING GROUND, MD 21005-5071	1	COMMANDER US ARMY LABCOM MATERIALS TECHNOLOGY LAB ATTN: SLCMT-IML (TECH LIB) WATERTOWN, MA 02172-0001	2
COMMANDER HQ, AMCCOM ATTN: AMSMC-IMP-L ROCK ISLAND, IL 61299-6000	1		

NOTE: PLEASE NOTIFY COMMANDER, ARMAMENT RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER, US ARMY AMCCOM, ATTN: BENET LABORATORIES, SMCAR-CCB-TL, WATERVLIET, NY 12189-4050, OF ANY ADDRESS CHANGES.

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST (CONT'D)

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
COMMANDER US ARMY LABCOM, ISA ATTN: SLCIS-IM-TL 2800 POWDER MILL ROAD ADELPHI, MD 20783-1145	1	COMMANDER AIR FORCE ARMAMENT LABORATORY ATTN: AFATL/MN EGLIN AFB, FL 32542-5434	1
COMMANDER US ARMY RESEARCH OFFICE ATTN: CHIEF, IPO P.O. BOX 12211 RESEARCH TRIANGLE PARK, NC 27709-2211	1	COMMANDER AIR FORCE ARMAMENT LABORATORY ATTN: AFATL/MNF EGLIN AFB, FL 32542-5434	1
DIRECTOR US NAVAL RESEARCH LAB ATTN: MATERIALS SCI & TECH DIVISION CODE 26-27 (DOC LIB) WASHINGTON, D.C. 20375	1 1	MIAC/CINDAS PURDUE UNIVERSITY 2595 YEAGER ROAD WEST LAFAYETTE, IN 47905	1
DIRECTOR US ARMY BALLISTIC RESEARCH LABORATORY ATTN: SLCBR-IB-M (DR. BRUCE BURNS) ABERDEEN PROVING GROUND, MD 21005-5066	1		

NOTE: PLEASE NOTIFY COMMANDER, ARMAMENT RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER, US ARMY AMCCOM, ATTN: BENET LABORATORIES, SMCAR-CCB-TL, WATERVLIET, NY 12189-4050, OF ANY ADDRESS CHANGES.